
**F1169.1525****Fasson®****PP OLF20 / SRP / BG40WH N**

**A gloss clear BOPP over-laminating film with a permanent general-purpose permanent acrylic-emulsion based adhesive on a white glassine liner**

## Application

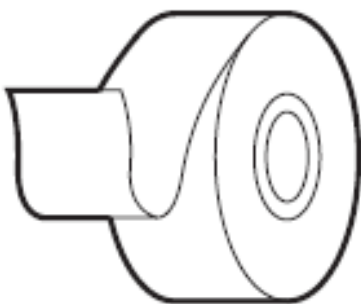

## Key Features

- > Over-laminating film to protect printed surfaces
- > A proven label adhesive suitable for room performance
- > Suitable for medium to high speed label application
- > Safe to use on packaging of food products where FDA 175.105 is required

### Facestock

A gloss clear BOPP over-laminating film.

Basis Weight	18 g/m <sup>2</sup>	ISO 536
Caliper	0.020 mm	ISO 534

### Adhesive

A general-purpose permanent, acrylic-based adhesive designed for filmic facestocks.

### Liner

A supercalendered, glassine paper, specially designed for medium to high speed conversion. Designed for accurate kiss / die-cutting.

Basis Weight:	60 g/m <sup>2</sup> ± 10%	ISO 536
Caliper:	53 µm ± 10%	ISO 534

### Laminate

Total Caliper 86 µm ± 10%

### Performance data

Initial Tack	420 N/m FTM 9 glass
Peel Adh. 90°	350 N/m FTM 2 st. st.
Min. Appl. Temp.	5°C
Service temp.	-20°C to 80°C

### Adhesive Performance

High degree of clarity and 'wet out' for clear filmic facestocks. Good initial tack and adhesion on a variety of substrates including apolar surfaces. Exhibits low bleed characteristics. Good die-cutting and stripping properties. Offers a wide service temperature range. Demonstrates good UV resistance.

### Applications and use

Over-laminating film to protect printed surfaces. Where clarity and protection is paramount.

### Conversion/printing

Complex shaped labels and square corners may limit the conversion speed.

#### NOTE:


Limited resistance to plasticizers found in PVC substrates and low molecular weight oils.

### Shelf life

One year when stored at 22°C ± 2°C and a relative humidity of 50% ± 5

## F1169.1525

### PP OLF20 / SRP / BG40WH N

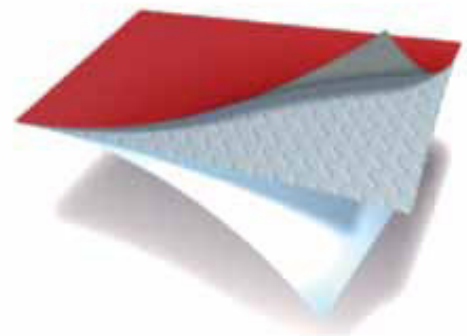

PP OLF 20

SRP

BG40WH N

### Australia

Avery Dennison Materials Pty Ltd  
Building 4, 1124 Centre Rd  
Oakleigh South VIC 3167  
Australia  
Tel +61 3 9271 0300  
Fax +61 3 9271 0333  
[www.label.averydennison.com.au](http://www.label.averydennison.com.au)

#### Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

liable or responsible for consequential or incidental damages. NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERNATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.